

## E-VOL60

100 volt, 60 watts Euro volume control, white



The Aart E-VOL60 is a 100 volt volume control. It can handle up to 60 watts of power. It is very versatile thanks to the step-by-step attenuation in 11 steps + zero position. The E-VOL60 is designed to handle 24V priority signals. This means that you can always get an announcement out, even to zones where the local volume control is in the 'OFF' position!

If your amplifier has a 24V priority output, it will send a 24V signal when you push the talk button on the microphone.

The 24V signal will close a relay on the E-VOL60 volume control, and the signal will pass, even when the volume control is in the 'OFF' position. This can be very useful for emergency or evacuation messages. The E-VOL60 is built on a universal chassis that easily can be integrated with Gira, Jung and Euro.

### TECHNICAL SPECIFICATIONS

|                               |        |                          |                  |
|-------------------------------|--------|--------------------------|------------------|
| stereo/mono                   | mono   | applicable low impedance | No               |
| applicable 100V               | Yes    | max. power in watts      | 60               |
| steps                         | 0 + 11 | 24 volt priority relais  | Yes              |
| mounting                      | screw  | connector type           | euroblock 6-pole |
| max. cable in mm <sup>2</sup> | 2.5    | width in mm              | 80               |
| height in mm                  | 80     | depth in mm              | 50               |
| weight in gr                  | 336    | Net weight product (kg)  | 0,35             |

MORE PICTURES




## ACCESSORIES




### **N-MODIN**

Helia built-in box for wall controls

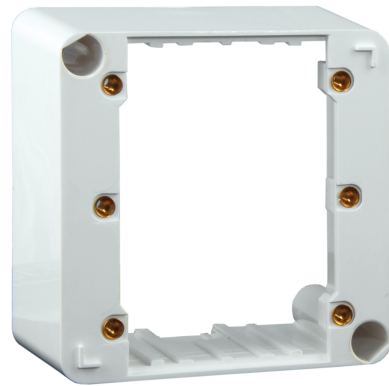

### **E-MODON**

Built-on box for wall controls

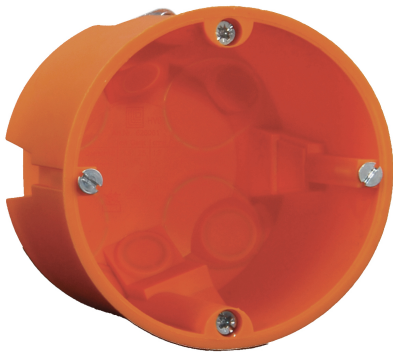

### **E-MODIN**

Build-in box for Euro controls