

# EN-MP5T20-W

EN54-24 certified compact sound projector 20W



The Apart EN-MP5T20-W is a compact and stylish sound projector made of powder coated aluminium (RAL 9010 equivalent), equipped with a high efficiency full range driver and a multi tap 100 volt transformer, all certified according EN 54-24. The unit is equipped with a ceramic speaker line connector block, junction box, thermal fuse and stainless installation bracket.

Equipped with a 5.25 inch woofer this IP65 rated sound projector is the stylish answer to all your background music, paging- and evacuation systems needs.

With a maximum of 20 watts at 100 volt this elegant speaker reaches twice the power of the EN-MP5T10-W.


## TECHNICAL SPECIFICATIONS

outside diam. in mm	140	depth in mm	183
loudspeaker system	full range	woofer size in inch	5.25
woofer cone material	coated paper	mounting system	2 screws
colour	white	100V transformer power taps in watts	20 - 15 - 10 - 5
SPL 1W/1m in dB	92.1	max SPL 1m in dB	105.1
frequency response in Hz	120 - 23 k	main construction material	aluminium
IP rating	65	operating temperatures	-40°C to +100°C
applicable low impedance	no	applicable in 100V	yes
certificate ref	1438/CPR/0356	Vertical dispersion angle 1000 Hz	180°
closest RAL colour (subject to deviations)	RAL9010	Net weight product (kg)	2.48

## POLAR PLOTS


Data Shown: EN-MP5T20-W (APart Audio)  
Display Parameters: Frequency: 1000Hz (1/24th Octave)

Horizontal  
Vertical

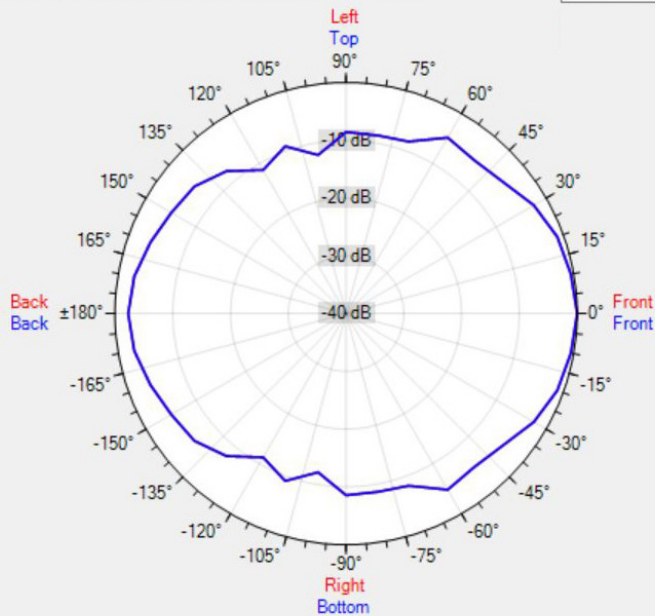


Data Shown: EN-MP5T20-W (APart Audio)  
Display Parameters: Frequency: 2000Hz (1/24th Octave)

Horizontal  
Vertical

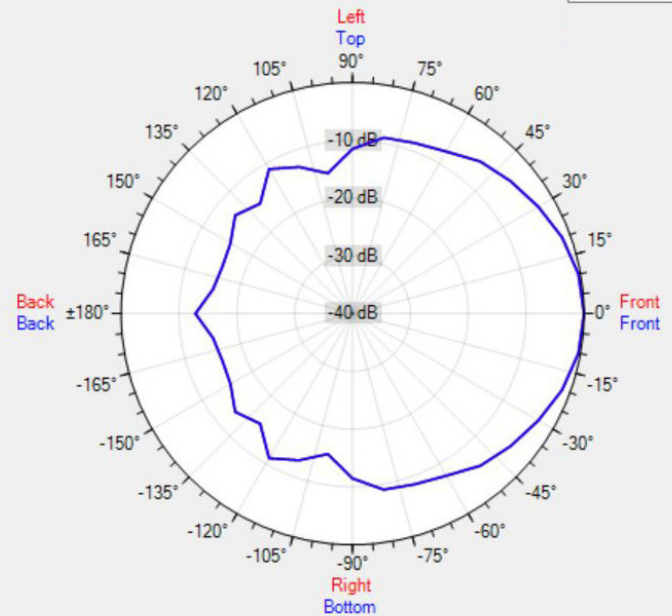


Data Shown: EN-MP5T20-W (APart Audio)  
Display Parameters: Frequency: 4000Hz (1/24th Octave)

Horizontal  
Vertical

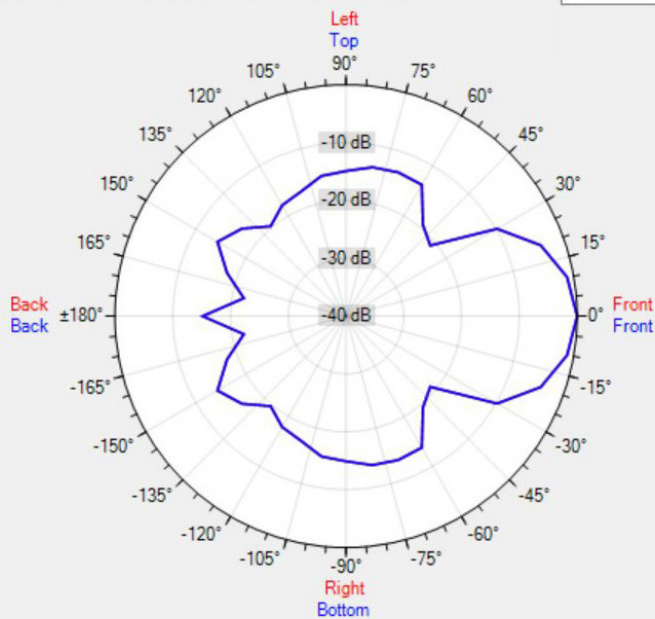

Data Shown: EN-MP5T20-W (APart Audio)  
Display Parameters: Frequency: 8000Hz (1/24th Octave)

Horizontal  
Vertical

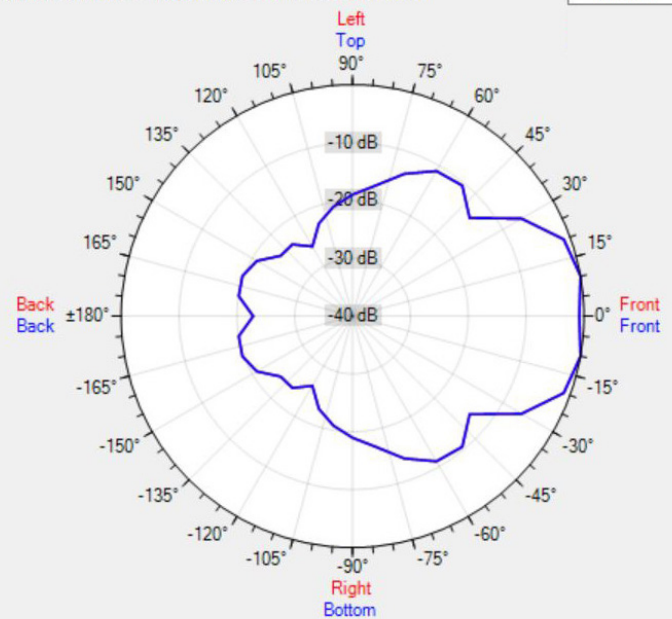

[MORE PICTURES](#)

